

**TEL-HT SERIES**



# TEL-HT

## TELECOM HIGH TEMP BATTERIES

WITH MSE PURE LEAD TECHNOLOGY



# POWER YOU CAN DEPEND ON.

C&D Technologies has been on the leading edge of standby battery development since 1906. Always pushing the limits, C&D strives to provide our customers with the most advanced battery technology on the market.

As standby battery applications become increasingly demanding, the batteries that support these applications must be improved to provide reliable service and long life in diverse environments.

With this in mind, C&D has introduced the TEL High Temperature Series VRLA batteries, featuring MSE Pure Lead Plus Technology. The TEL High Temperature Series takes the best features from the industry-leading msEndurII 2V VRLA, C&D's TEL Long Duration Series' proven reliability, and the unmatched design of C&D TRUE Front Access® series to provide one of the most reliable 12V VRLA batteries available. The TEL High Temperature series provides 12+ years of life under normal operation, and is able to deliver reliable performance even in high temperature environments.

## APPLICATIONS


### Uncontrolled Environments

- ◆ Wireline
- ◆ Wireless
- ◆ Outdoor Cabinets
- ◆ Broadband
- ◆ Microwave Repeaters
- ◆ Fiber Optic Regen Sites

### Controlled Environment for

#### Extreme Long Life

- ◆ Central Offices
- ◆ Customer Premise / PBX

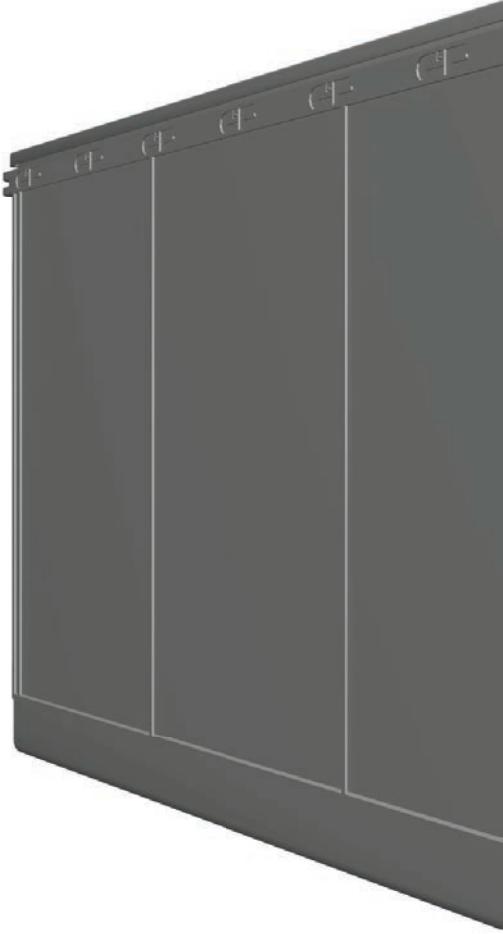



The TEL High Temperature Series is designed to provide standby power to critical applications in the Telecommunications industry. They undergo extensive life cycle testing to ensure the longest and most reliable service life possible. It brings together the best features found in C&D's previous Telecom models to deliver a group of quality batteries designed to withstand rigorous heat environments.

- ◆ MSE Pure Lead Technology
  - + Ultra low float current
  - + Long life float service design
- ◆ Non-Hazardous for Transportation
- ◆ Extended service life in elevated temperature applications
  - + 12+ years design life
- ◆ Premium Materials and Components
- ◆ Reduced Maintenance Terminal Design
- ◆ UL1989 Compliant
- ◆ UL94-V0 Compliant Case and Cover

# HOW WE CREATED THE HIGH TEMPERATURE SERIES



## TEL-HT

## TELECOM HIGH TEMP BATTERIES

WITH MSE PURE LEAD TECHNOLOGY

Much of C&D's success in the Telecom market can be attributed to its quality and advanced technologies, providing customers with a reserve power solution they can depend on. With power requirements increasing and space decreasing, a shift towards VRLA products became necessary. C&D embraced this challenge with the TEL Long Duration Series with a proprietary high density active material and robust grid design that provided a documented 12+ years of life in industry-standard footprints. The Long Duration Series was enhanced in 2008 with the introduction of C&D True Front Access® designs that gave customers increased energy density and simplified maintenance without sacrificing reliability. For sites with larger power requirements and increased reliability concerns, the pure lead msEndurll is used. The MSE technology used in the msEndurll reduces the float current required to keep these batteries at a full state of charge, resulting in slowed corrosion rates and a 20 year service life. The advanced technologies developed in each of these products have been combined into one long life, high energy density product family, the TEL High Temperature Series.



**2002** **TEL LONG DURATION**  
C&D purchased from Johnson Controls International

**2004** **MS ENDUR II**  
C&D released the msEndur featuring MSE technology later improved to the msEndur II

**2010** **C&D TRUE FRONT ACCESS®**  
C&D designed the only "True" Front Access on the market

**2019** **TEL-HT**  
C&D releases pure lead Telecom series battery designed for long life in all environments

## LONG DURATION SERIES

### TEL LONG DURATION SERIES

- ◆ EUROBAT Long Life Classification
- ◆ 10-Year Design Life
- ◆ Field proven materials and design up to 15 year life



*ms* **endur**® II

- ◆ Telcordia SR4228 Tested and Certified
- ◆ 20-Year Design Life
- ◆ Ultra-Low Float Current
- ◆ MSE Pure Lead Plus Technology



### C&D TRUE FRONT ACCESS®

- ◆ Patented Front Access Terminal Design
- ◆ Direct Weld to Front Posts
- ◆ Oversized Terminal for Ease of Maintenance

## WHAT IS MSE PURE LEAD PLUS TECHNOLOGY?

The TEL High Temperature Series features MSE Pure Lead Plus Technology, providing long life and exceptional performance in uncontrolled temperatures. C&D uses a proprietary Ball Mill Oxide made with ultra-high purity positive and negative active materials in addition to specialized processing techniques. This high-tech recipe creates a well-balanced cell that operates with reduced float current similar to a flooded cell, slowing grid corrosion and limiting water loss typically associated with traditional VRLA batteries.


**The benefit of using high purity materials, including high purity oxides, is a reduction of gassing reactions on float charge. Optimized Grid Lead alloys also limit corrosion, particularly intergranular corrosion of the positive grid.**

### ADVANTAGES

- ◆ Reduced Grid Corrosion
- ◆ Reduced Float Current
- ◆ Slower Aging Mechanisms
- ◆ 2X Longer Life in Float Operation
- ◆ Longer Storage Life
- ◆ Reduced Internal Temperature and Water Loss
- ◆ Stable Operation at High Temperatures


### FLOAT CURRENT

C&D developed the MSE Pure Lead Plus Technology to fundamentally change the way our batteries operate that leverage this innovation. The effects on the active material are measurable and lower float currents are achieved using a high density, large pore structure in the active materials, through proprietary plate manufacturing processes and low corroding positive grid alloys. Low float currents allow batteries to operate at higher temperatures while minimizing risks of thermal walkaway. The result is a longer battery life as seen in the graph below.

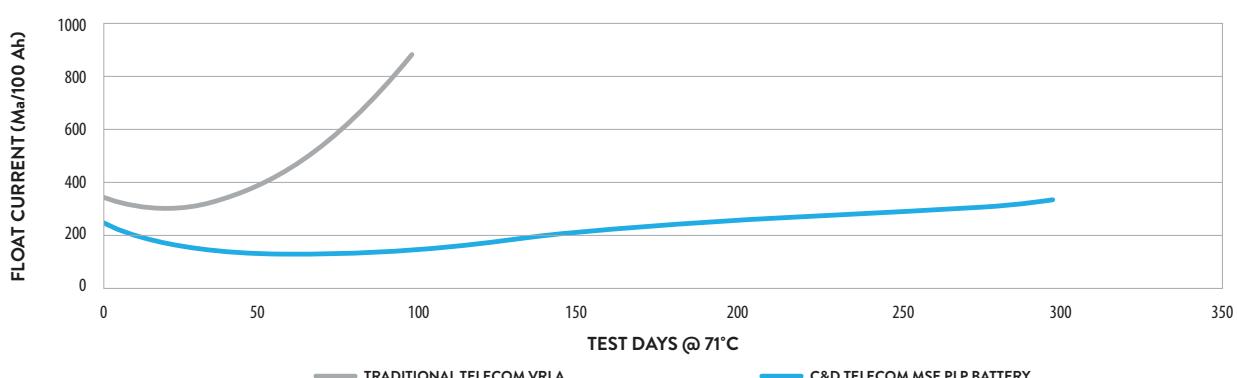

# WATER LOSS

One of the leading causes of VRLA battery failure is water loss. As a VRLA battery ages, it will start to lose water more rapidly, leading to dryout and decreased capacity. The MSE Pure Lead Plus Technology in the TEL High Temperature reduces water loss by up to 50%, a critical component to long life at high temperatures.

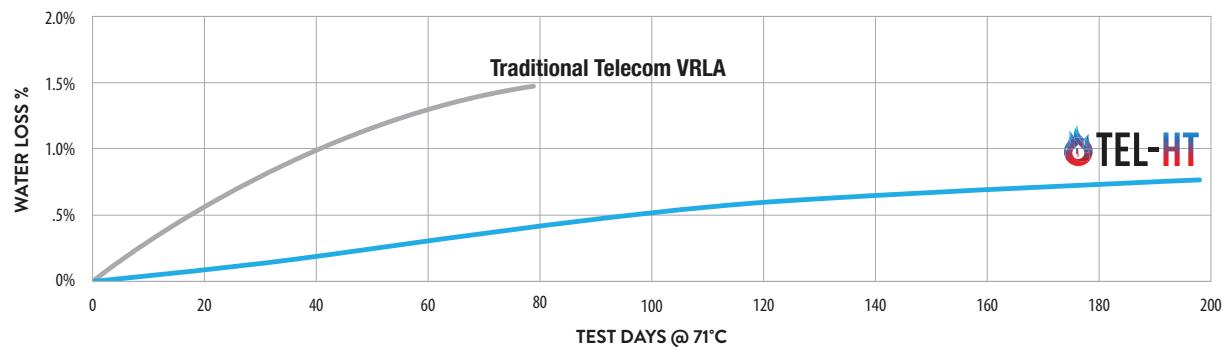

## STRONG DESIGN

In any application where the battery may face extreme temperature, shock, or vibration conditions, a rugged case is key to maintaining battery performance over time. All TEL-HT batteries are encased in strong polypropylene that protects all the battery's components and ensures that the battery will work year after year in the most demanding environments.

SPECIFICATIONS	
OPERATING TEMPERATURE	Discharge: -40°F to +160°F (-40°C to +71°C) Charge: -10°F to +140°F (-23°C to +60°C)
RECOMMENDED CHARGING CURRENT	C20/5Amperes (Maximum) @ 77°F (25°C)
FLOAT CHARGING VOLTAGE	13.65VDC +/-0.15VDC Per 12V Unit
TEMPERATURE COMPENSATION FLOAT CHARGE	3.6mV/Cell°C from (77°F) 25°C (13.434 VDC @35°C)
EQUALIZE CHARGING VOLTAGE	14.40 VDC to 14.80 VDC Per 12V Unit
STORAGE	Battery may be stored up to 2 years at 77°F (25°C)
TERMINAL (155FHT, 170FHTG, 180FHT, 190FHT, & 200FHT)	Threaded copper alloy insert terminal: 1/4-20 bolt @ 110 in-lbs (12.4 N-m)
TERMINAL (105FHTG & 115FHT)	Threaded copper alloy insert terminal: M6 bolt @ 90 in-lbs (10.2 N-m)
SELF STORAGE	Battery can be stored up to 24 months at 77°F (25°C) before a freshening charge is required.

MODEL NAME	NOMINAL CAPACITY 8 HOURS TO 1.75 VPC @ 25°C	IEC CAPACITY 10 HOURS TO 1.80 VPC @ 20°C	WEIGHT LBS (KG)	MAXIMUM DISCHARGE CURRENT	OHMS IMPEDANCE 60 HZ (Ω)
<b>TEL HIGH TEMPERATURE SERIES MODELS</b>					
TEL12-105FHTG*	101 Ah	98 Ah	72 (32.8)	800A	0.0065
TEL12-115FHT	104 Ah	101 Ah	73 (33.0)	800A	0.0056
TEL12-155FHT	147 Ah	148 Ah	104 (47.0)	800A	0.0054
TEL12-170FHTG*	162 Ah	163 Ah	110 (49.5)	800A	0.0048
TEL12-180FHT	181 Ah	174 Ah	124 (56)	800A	0.0043
TEL12-190FHT	199 Ah	195 Ah	135 (61)	800A	0.0042
TEL12-200FHT	195 Ah	192 Ah	132 (60)	800A	0.0042



\*TFA Gas Collection System

# TEL-HT SPECIFICATIONS

MODEL NAME	VOLTAGE	CONSTANT CURRENT DISCHARGE RATINGS - AMPERES @ 77°F (25°C)													DIMENSIONS INCHES (mm)		
		OPERATING TIME (Hr.) TO 1.75 VOLTS PER CELL															
1	2	3	4	5	6	7	8	10	12	20	24	72	LENGTH	WIDTH	HEIGHT		
<b>TEL HIGH TEMPERATURE SERIES MODELS</b>																	
TEL12-105FHTG*	12 VOLT	70.10	39.80	28.50	22.60	18.70	16.00	14.00	12.50	10.20	8.70	5.50	4.70	1.70	16.2 (412)	4.2 (106)	11.4 (289)
TEL12-115FHT	12 VOLT	68.60	39.50	28.60	22.80	19.10	16.40	14.40	13.00	10.60	9.00	5.80	4.90	1.70	20.1 (511)	4.3 (109)	9.1 (232)
TEL12-155FHT	12 VOLT	96.70	58.90	42.10	33.10	27.40	23.50	20.70	18.50	15.30	13.10	8.50	7.30	2.60	22.0 (559)	4.9 (126)	10.9 (277)
TEL12-170FHTG*	12 VOLT	109.00	62.10	45.10	35.70	29.80	25.60	22.50	20.30	16.80	14.20	8.90	7.50	2.60	22.0 (559)	4.9 (126)	11.2 (285)
TEL12-180FHT	12 VOLT	125.70	72.40	52.00	41.00	34.20	29.20	25.70	22.90	18.80	15.90	10.00	8.50	3.00	22.0 (559)	4.9 (126)	12.4 (315)
TEL12-190FHT	12 VOLT	131.20	78.20	56.60	44.60	36.90	31.80	27.90	24.90	20.50	17.50	11.00	9.20	3.20	22.0 (559)	4.9 (126)	12.4 (315)
TEL12-200FHT	12 VOLT	132.70	79.50	56.20	44.00	36.40	31.10	27.30	24.40	20.10	17.20	11.00	9.40	3.30	22.0 (559)	4.9 (126)	12.52 (318)

\*TFA Gas Collection System

## FRONT ACCESS

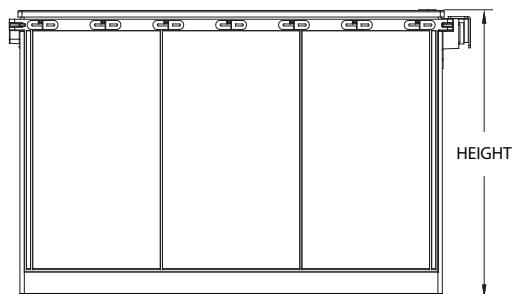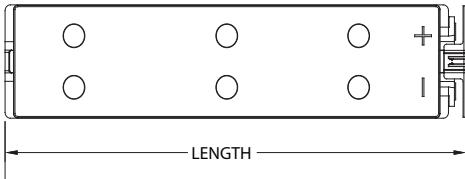

©2025 C&D Technologies Inc. Any data, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application.

200 Precision Road, Horsham, Pennsylvania 19044 USA | [www.cdtechno.com](http://www.cdtechno.com)



**C&D**  
**TECHNOLOGIES**